



SPINDLEX TECHNOLOGIES CO., LTD.

No. 21, Ln. 204, Zhongxing N. ST., Sanchong Dist.,
New Taipei City 241, Taiwan (R. O. C.)

TEL : +886-2-29950267

E-mail:spindlex@ms34.hinet.net

FAX : +886-2-29958334

Web:<http://www.spindlex.com.tw>

Technical Specifications for Built-In Motor-Spindle

Spindle type : SYF-190

1. Spindle housing diameter (mm) and mounting:	Ø190h6 vertical or horizontal
2. Maximum speed (rpm) :	15,000rpm – HSK-A63 15,000rpm – BBT-40
3. Nominal speed:	1,750rpm
4. Motor type:	FANUC Built-In Motor
5. Motor power S1/S6 (Kw) :	7.5 / 11 Kw
6. Motor voltage / poles :	220v/4
7. Spindle torque at power S1/S6(Nm):	31 / 46 Nm
8. Shaft orientation Encoder (Vector control):	FANUC-encoder
9. Bearing type:	hybrid bearing
10. Front bearing inner diameter(mm):	Ø65mm
11. Bearing preloading :	constant springs preload
12. Bearing lubrication:	Grease
13. Bearing temperature sensor :	sensor on the front bearing (option)
14. Tool interface:	HSK-A63 (DIN69893) BBT-40 (JISB6340-1992 MAS-P40T-1 (45°))
15. Clamping capacity :	Ø3~32mm
16. Tool holding force(N) :	18,000N-HSK 9,000N-BBT
17. Tool release :	hydraulic (standard) 3 ATC sensors
18. Motor cooling :	water with additive
19. Spindle cooling (Kcal/h) :	6,000 Kcal/h
20. Coolant through shaft :	cooling through the center(option)
21. Converter nominal power(KVA) :	
22. Spindle weight :	100Kgs



SPINDEX TECHNOLOGIES CO., LTD.

No. 21, Ln. 204, Zhongxing N. ST., Sanchong Dist.,
New Taipei City 241, Taiwan (R. O. C.)

TEL : +886-2-29950267

E-mail:spindex@ms34.hinet.net



FAX : +886-2-29958334

Web:<http://www.spindex.com.tw>

Spindle type : SY-190

Power and Torque-diagram for Built-In Motor-Spindle

Low winding

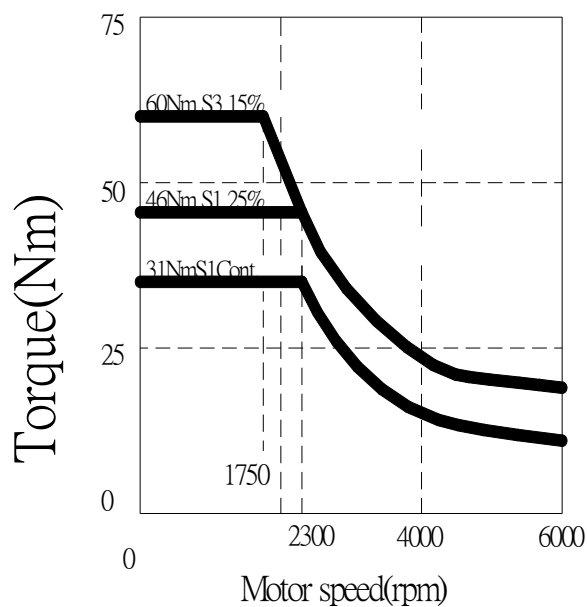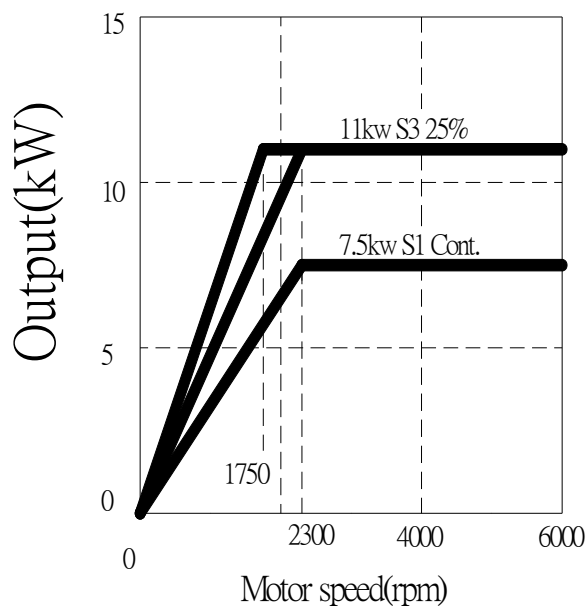



SPINDLEX TECHNOLOGIES CO., LTD.

No. 21, Ln. 204, Zhongxing N. ST., Sanchong Dist.,
New Taipei City 241, Taiwan (R. O. C.)

TEL : +886-2-29950267

E-mail:spindlex@ms34.hinet.net

FAX : +886-2-29958334

Web:<http://www.spindlex.com.tw>

High Winding

